




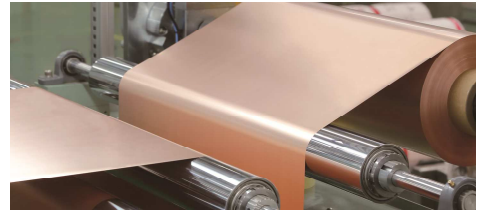





# 锂电池负极铜箔 TC-foil

- 适用于高容量锂电池的负极电解铜箔。
- 通过特殊的表面处理技术可获得良好的涂层性能。
- 产品宽度：~1400mm。  
最小购买单位：1000m。



Products Grade		12B	12K	12S	ISS	Test method
Property	unite					
Thickness	μm	6, 8, 10, 12, 15, 20	6, 8, 10	4~20	4~20	IPC-4562A
Tensile strength (at room temp.)	kgf/mm <sup>2</sup>	≥30	≥50	≥40	≥48	IPC-4562A
Tensile strength (at 200°C 1hr)	kgf/mm <sup>2</sup>	-	≥20	-	-	IPC-4562A
Elongation (at room temp.)	%	≥4	≥3	≥4	≥3	IPC-4562A
Elongation (at 200°C 1hr)	%	-	≥10	-	-	IPC-4562A
Roughness	μm	≤2.2	≤2.0	≤1.8	≤1.8	IPC-4562A
Glossiness	-	≥60	-	-	-	JIS Z8741
Construction		 <Matte side>	 <Matte side>			-
		 <Shiny side>	 <Shiny side>			
Elongation vs Tensile strength		-	-			-
Productive Information		<ul style="list-style-type: none"> <li>•Regular grade</li> <li>•Mobile, HEV, EV, etc.</li> <li>•Low surface profile</li> <li>•Excellent flat uniformity</li> </ul>	<ul style="list-style-type: none"> <li>•Mobile, HEV, EV, etc.</li> <li>•High strength</li> <li>•High elongation</li> <li>•Low surface profile</li> </ul>	<ul style="list-style-type: none"> <li>•Mobile, HEV, EV, etc.</li> <li>•High Toughness</li> <li>•High Tensile strength</li> <li>•Good handling behavior</li> </ul>	<ul style="list-style-type: none"> <li>•High Toughness</li> <li>•Use of high energy density (Mobile, HEV, EV, etc.)</li> <li>•Excellent thermal stability</li> </ul>	-

原产国：韩国

分销商：



上海乐拜国际贸易有限公司

上海市浦东新区浦东南路1288号 华融大厦1106室 (邮编200122)

Tel. 021-58820929, 58820969 / Fax. 021-68887288

Web <http://www.utass.com.cn>